

Description

LED Panel 60x60 - 36W

Technical Specificaties

LED Power(W)	36W
Recessed mounted	frame (Option)
Lumen output (Lm)	4350Lm @4000K
Lumen/Watt	120 Lm/w
CCT	3000K, 4000K, 5000K
Beam Angle (°)	120
Power factor	0.98
CRI	>80
IP waarde	20
Input Voltage	230 VAC
Energy class	E
UGR	<19
LEDs	240pcs
Flicker free driver	Include
Driver intern/extern	extern
output current	800mA
Input current	240mA
Warranty	5 years
Dimmable	no
Dimensions: lxbxh (mm)	595x595x8mm
Lifespan (Hr)	50.000Hrs L80B10
Packing Box (pcs)	2

Project prices on request

01/2025

Available in :

CCT: 3000K

CCT: 4000K

CCT: 5000K

CCT: RGBW(4000k)

Surface mounted frames

White frame

Art. No.

0200-036-3000


0200-036-4000

0200-036-5000

0200-036-RGBW

Art. No.

0204-000

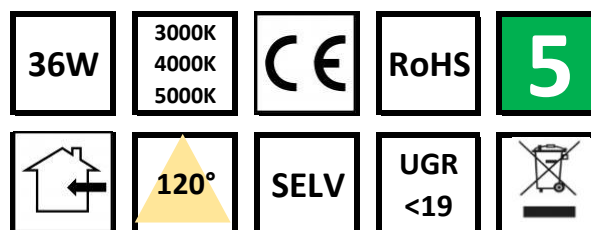

Durable – Delightfull – LED