

**Description**

**ALL. LED Downlight 6W**


**Technical Specifications**

LED power (W)	6W
UGR	≤19
Lumen output (Lm)	570Lm
Lumen/Watt	95
CCT(K) Switch	2700K°-3000K°-4000K°
Beam Angle (°)	60°
•Anti-glare PMMA lens-> excellent visual comfort.	
CRI	Ra>90
IP waarde	54
Inpute Voltage(Vac)	220-230V 50Hz
Power factor	>0,95
LED chip	Cree COB
Energy Classe	F
finish: power coating	White or Black
Material:	Die casting Alum.
Driver include	Buld in
Dimmable	Triac
Warranty (years)	3 years
Cut out Ø	68mm
Dimensions: Øx H (mm)	80x48mm
Life time:	40000Hrs
Adjustable (Tilt)	Yes (15°)

6W	220V	CCT Adjust	CE
IP44	60°	Triac DIM	RoHS



**Bult-in Triac Dim. Driver**

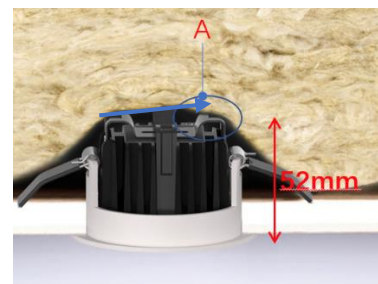

01/2023

**\*\*With isolation bracket for air convection**

**Available in:**

**White Alum. housing**

**Black Alum. housing**

**Article no.**

**0245-006-CCT-WH**

**0245-006-CCT-BL**

*Durable – Delightfull – LED*