

Description

Recessed & Surface Downlight series

Technical Specifications

LED power (W)	13W-18W & 25W-35W
Mounting: Recessed Ceiling	Cut out: 120mm
Lumen output (Lm)	110Lm/W (max)
Beam angle (°)	90° reflector
CCT(K°)	3000K or 4000K
IK rating	IK03
IP factor	IP54
CRI	>80
rate Inpute (Vac)	220-230V 50Hz
LED module inpute	DC33-38V
Power factor	>0,95
LED chip	COB
Energieklasse	F
Alum. Housing	White or Black
Working temp.	-40° / +50°
Warranty (years)	3
Incl. Externe dimmable driver	Triac; 0-10V; Dali
Dimensions Ø x H (mm)	Ø145x52mm
Life time	50000Hrs
Packing/box	1

Applications in office, supermarket, shop, school, hotel

08/2023

Also available in:

13W 1430Lm Art.no. 0250-013-3000 or 4000K (recessed)


18W 1950Lm Art.no. 0250-018-3000 or 4000K (recessed)

***Option: Surface Mounted Kit: Art.no. 0250-004**

25W 3000Lm Art.no. 0250-025-3000 or 4000K (recessed)

35W 4500Lm Art.no. 0250-035-3000 or 4000K (recessed)

***Option: Surface Mounted Kit: Art.no. 0250-008**

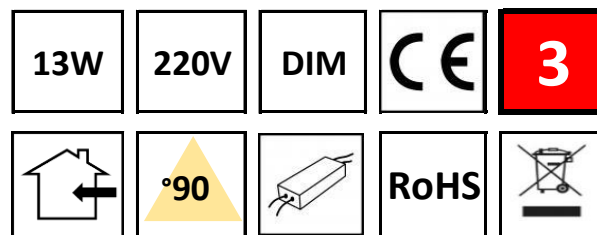

↓
Surface mounted kit

Dimensions

Ø145mm	H:52mm
Ø145mm	H:52mm
Ø148mm	H:93mm
Ø228mm	H:59mm
Ø228mm	H:59mm
Ø232mm	H:93mm

Cut out

Ø 120mm
Ø 120mm
Ø200mm
Ø200mm

Durable – Delightfull – LED