

Description

**Round Ceiling 3xCCT downlight**

Technical Specifications

LED Power(W)	25W
Mounting	Bracket
Lumen output (Lm)	2750Lm (max)
Lumen/Watt	110Lm/W (max)
CCT (K) dip-Switch	3000K , 4000K or 6000K
beam angle(°)	120°
IK factor	10
CRI	>85
IP factor	54
Inpute (Vac)	220-230V 50Hz
energy class	F
LED chip	2835SMD
LED Flicker free	EPISTAR
Power factor	>0,95
<b>* Quick connection without opening the housing</b>	
Driver included	yes
Workings temp.	-40° / +50°
Warranty	3 Years
Dimmable	Option
dimensions: Ø x h (mm)	330x48mm
life time	45000Hrs
Weight	0,7kg

**Include Colorchange Dip switch**


08/2023

Available in:

**25W with colorchanging**  
**+ motion sensor**  
**+ 3W Emergency Kit**  
**+ sensor & Emergency Kit**

Article no.

**0260-025-0001**  
**0260-025-0002**  
**0260-025-0003**  
**0260-025-0004**

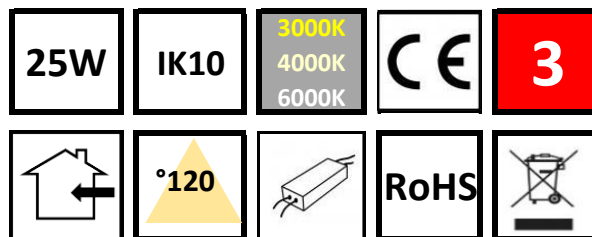

*Durable – Delightfull – LED*



*Durable – Delightfull – LED*

---

Alltronic bv  
Ringlaan 72  
3630 Maasmechelen

**T** +32 (0)89 51 43 55  
**E** ledsmeet@alltronic.be  
**W** www.alltronic.be

**BTW/TVA** BE0444.840.218  
**BNP Paribas fortis** BE17 0011 8812 6021  
**BIC** GEBABEBB

