

Description

Low Profile LED Module 8W

Technical Specification

LED power (W)	8W
Mounting method:	Recessed Fixtures
Lumen/W (Lm)	100Lm/W (max)
Lumen output	800Lm (max)
CCT	2700K-3000K
UGR	<19
Beam Angle (°)	60° (reflector)
CRI	Ra90
IP	44
DC Inpute (Vac)	24VDC
Power factor	>0,95
LED chip	CREE
Dimmable:	PWM
Power coating finish:	Die-cast Alu. Black
High quality LED with consistent color temperature.	
Warranty	3 years
Lifetime (Hr)	L80B20: 50000Hrs
Dimension: Ø x h (mm)	Ø50xH52mm
Packing number (pc)	1
Ideal for DC 24V KNX, DALI, LOXONE, DMX, TUYA, CASAMBI	

01/2024

Available in:



CCT 2700K

CCT 3000K

Article No.

1650-008-2700

1650-008-3000

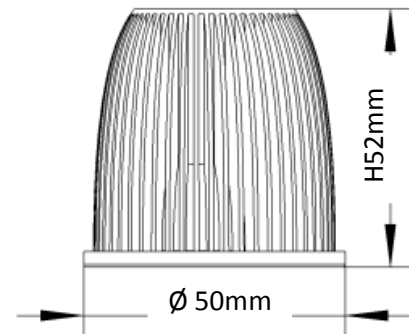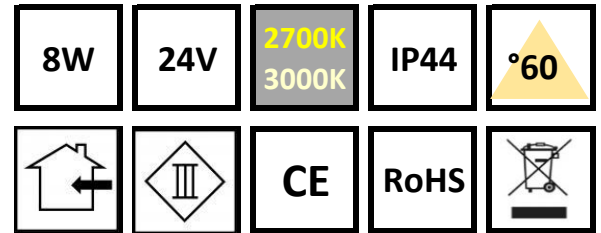

Durable – Delightfull – LED