

Description

Downlight ALL-F series

Technical Specifications

LED power (W)	15W-20W-30W-40W
Mounting:	Recessed
Lumen output (Lm)	110Lm/W (max)
Input Voltage	220V-230V
CCT(K°)	2700K, 3000K or 4000K
CRI	>90
IP factor	IP54
Beam angle (°)	90° reflector or milk glass
Power factor	>0,95
LED Option:	CREE COB or Osram LED
Life time	50000Hrs
Alum. Housing	Matt White or Matt Black
Working temp.	-40° / +50°
Warranty (years)	3
Driver can Be:	On/OF, Triac; 0/1-10V or Dali
Dimensions Ø x H (mm)	Ø110x53mm
Hole cutting	Ø90mm
Packing/box	1
Applications in office, supermarket, shop, school, hotel	
Project prices on request !	

01/2025

Also available in:

20W Ø145xH69mm (reflector)
30W Ø190xH86mm (reflector)
40W Ø230xH99mm (reflector)

15W Ø110xH53mm (glass)
20W Ø145xH69mm (glass)
30W Ø190xH86mm (glass)
40W Ø230xH99mm (glass)

Article No.


0250-020-0000
0250-030-0000
0250-040-0000

0251-015-0000
0251-020-0000
0251-030-0000
0251-040-0000

Cut out

Ø125mm
Ø165mm
Ø200mm

Ø90mm
Ø125mm
Ø165mm
Ø200mm

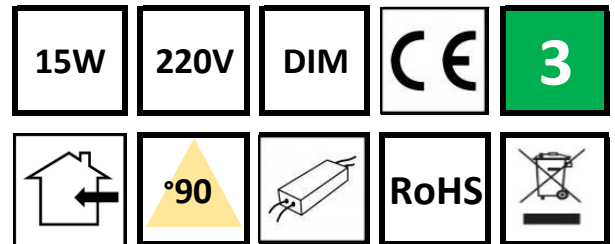

LEDs Light the Future.....

