


### Description

**LED Tri-Proof Power& 3CCT selectable**

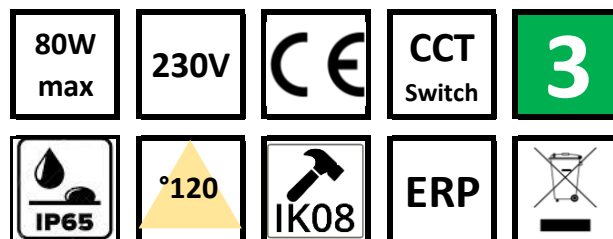

### Technical Specifications

LED Power (W) Dip switch	80W-60W-45W
Mounting	Quick fix brackets
Lumen output (Lm)	11200Lm(80W & 4000K)
Lumen/Watt	140Lm/W
CCT (K)) Dip switch	3000K-4000K-5000K
Beam Angle (°)	120°
Power factor	0,8
CRI	Ra>80
IP	65
AC Inpute (Vac)	220-240 (50Hz)
IK	8
LED chip	SMD2835
UV resistance	Yes
Energy Classe	<b>D</b>
Linkebale	Option
Driver incl.	Osram (intern)
Cover	Opal
Warranty (Years)	3
Dimmable:	ON/OFF
Dimensions lxbxh (mm)	1500x79x68mm
Number in box	9Pcs
Packing (pcs)	1



01/2025

Also available in  
**L= 1200mm (20W-30W-40W)**

Article No.:  
**8612-040-CCT**

**Durable – Delightfull – LED**

