


### Description

LED Tri-Proof Power& 3CCT selectable

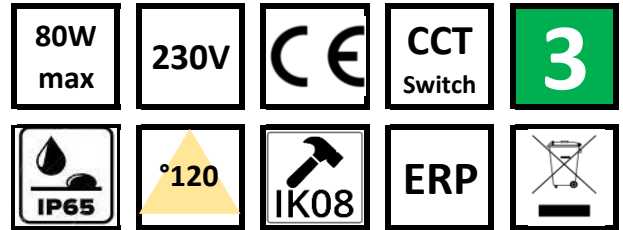

### Technical Specifications

LED Power (W) Dip switch	80W-60W-45W
Mounting	Quick fix brackets
Lumen output (Lm)	11200Lm(80W & 4000K)
Lumen/Watt	140Lm/W
CCT (K) Dip switch	3000K-4000K-5000K
Beam Angle (°)	120°
Power factor	0,8
CRI	Ra>80
IP	65
AC Inpute (Vac)	220-240 (50Hz)
IK	8
LED chip	SMD2835
UV resistance	Yes
Energy Classe	E
Linkebale	Yes
Driver incl.	Osram (intern)
Cover	Opal
Warranty (Years)	3
Dimmable:	ON/OFF
Dimensions lxbxh (mm)	1500x79x68mm
Number in box	9Pcs
Packing (pcs)	1



01/2024

#### Options:

Dali dimming

Sensor kit (H=4m max)

Emergency system (3W & 2Hr)

\*Also available in 1200mm (40W max)

#### Article No.:

8615-080-CCTDa

8600-001

8600-002

8612-040-CCT

*Durable – Delightfull – LED*