ALLTRONIC
LED THERE BE LIGHT

Description

100W	RGB CCT	DMX 512	RoHS	5
IP65	IK08	RF	IEC EN62471	

LED Stage Flood Light RGBCCT
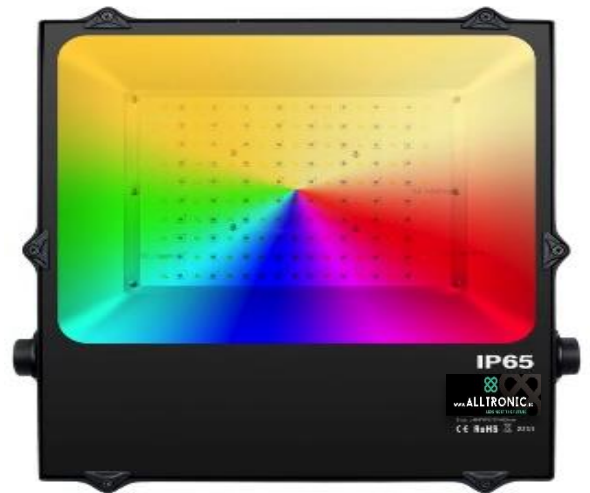(Professional)
Technical Specifications

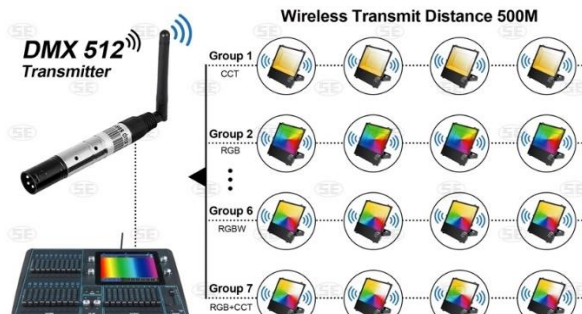|	
LED Power (W)	100W
Mounting	Surfaced by bracket
LED Qwantity	100pcs
Lumen/Watt	75lm/W
CCT (K°)	RGB +CCT
Beam Angel (°)	60° or 90° or 120°
Power factor	0.9
CRI	Ra>80
IP factor	IP65
Inpute Voltage (Vac)	230V/24V
IK rated	8
LED type:	3030RGB+3030White SMD
LED Brand	CREE
Diffuser:	Tempered glass
Housing:Nicely die- casting Alum. alloy	**Black**
Control methods:	RF Remote Control
or DMX Control or DMX Wireless Control	
Warranty: (indoor & outdoor)	5 years
Life Span	50.000 Hrs
Dimensions 100W type : hxbxd (mm)	413x315x63mm
Fixture Connections:	
Applications: Illuminating buildings & stages in colors	

01/2024

** Also available in 150 or 200W on request !

CCT Type	RGB Type	RGBW Type	RGBCCT Type
Light Source 3030	Light Source 3030RGB	Light Source 3030RGB+3030White	Light Source 3030RGB+3030White

Other types:

	CCT:	9045-100-CCT
	RGB	9045-100-RGB
	RGBW	9045-100-RGBW

2.4G 4 Zones — Each Light within 30M

DMX 512 Transmitter

Wireless Transmit Distance 500M

Group 1 CCT
Group 2 RGB
Group 6 RGBW
Group 7 RGB+CCT

Durable – Delightfull – LED